

Static Analysis and Experimentation of Jute Fiber Reinforced with E-Glass

B.SudhaBindu,

Dept of Mechanical, VJIT college, India
sudhabindu@gmail.com

ABSTRACT- A composite is a heterogeneous material created by the synthetic assembly of two or more components constituting reinforcing matrix and a compatible matrix to obtain specific characteristics and properties. In this project we Selected jute fiber, E-Glass and it is embedded in a biopolymer matrix system (epoxy), the task of which is to hold the fibers together, this provides and stabilizes the shape of the composite structure, transmits the shear forces between the mechanically high-quality fibers, and protects them against radiation and other aggressive media and the specimen is prepared. The component is conditioned and prepared for testing and subjected to tensile, compression, hardness and bending test calculating the element results with ansys by using the test results. The main aim of this project is to reduce the impact on the environment, by preparing specimen using recyclable natural fibers.

KEYWORDS: Jute, E-Glass, Epoxy, Ansys

I. INTRODUCTION

India endowed with an abundant availability of natural fiber such as Jute, Coir, Sisal, Pineapple, Ramie, Bamboo, Banana etc. has focused on the development of natural fiber composites primarily to explore value-added application avenues. Such natural fiber composites are well suited as wood substitutes in the housing and construction sector. The development of natural fiber composites in India is based on two pronged strategy of preventing depletion of forest resources as well as ensuring good economic returns for the cultivation of natural fibers. The developments in composite material after meeting the challenges of aerospace sector have cascaded down for catering to domestic and industrial applications. Composites, the wonder material with light-weight; high strength-to-weight ratio and stiffness properties have come a long way in replacing the conventional materials like metals, wood etc. The material scientists all over the world focused their attention on natural composites reinforced with Jute, Sisal, Coir, Pineapple etc. primarily to cut down the cost of raw materials.

II EXPERIMENTAL

Materials: E-Glass(density 2.44gm/cm^3 , Tensile strength 2000Mpa), Jute(density 1.3gm/cm^3 , tensile strength 393-793Mpa), Epoxy(Density 1.44gm/cm^3 , tensile strength 2860-3750Mpa).

Compounding: Wax is applied to frame and as well as to GI sheet of 200mmx100mm with a height of 10mm 3 layer and 4 layers. Then GI sheet is placed in the frame and resin is mixed with hardener with required proportions and adhesives are applied.

Specimen Preparation: The mould sample for testing were compression moulded using compression moulding at 150°c and 50mpa for 10mins. After Pressing the sheet is removed from the press and cooled by water.

III CHARACTERIZATION TECHNIQUES

Tensile Strength: Tesile Properties are evaluated according to FIE-40 and UTN-40 of universal tensile machine.

Bending: Bending Properties are evaluated according to Universal testing machine UTE-60.

Shore Hardness: Hardness test is carried out by ASTM D 2240:2003 of Shore Hardness Tester.

IV RESULTS AND DISCUSSIONS

The mechanical properties of tensile strength, bending and hardness are compared to both the 3-layered and 4-layered specimens. The analysis of the specimen is carried out in Ansys software in which designing, meshing are done for both the layers. Designing is done wrto XY coordinates and in meshing "Preprocessor-meshing-mesh-areas-3or 4 sided -ok". Then solution and the results.


For 3-layered specimen:

Tensile Test(N)	Bending Test(N)	Compression Test(N)	Shore Hardness Test(N)
1520	600	900	88


For 4-layered specimen:

Tensile Test(N)	Bending Test(N)	Compression Test(N)	Shore Hardness Test(N)
1960	500	1300	91

TENSILE TEST RESULTS OF JUTE GLASS JUTE SPECIMEN (3-LAYER)

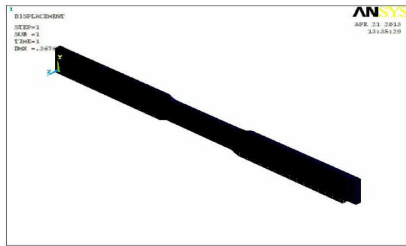


Deformed shape

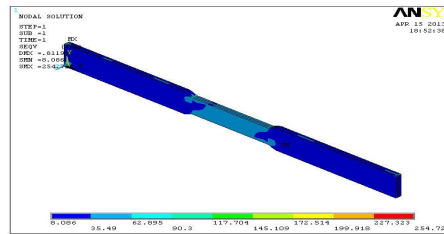


Von mises stress

TENSILE TEST RESULTS OF JUTE GLASS JUTE GLASS SPECIMEN (4-layer)

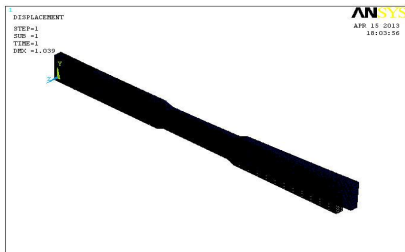


Deformed shape

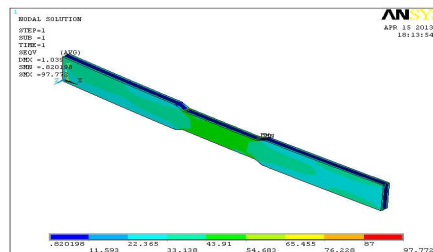


Von mises stress

BENDING RESULTS OF JUTE GLASS JUTE SPECIMEN (3-layer)

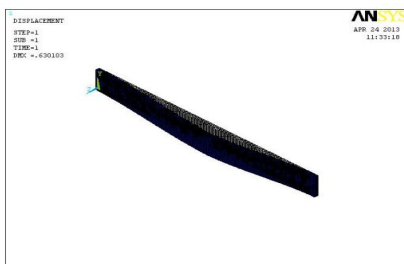


Deformed shape

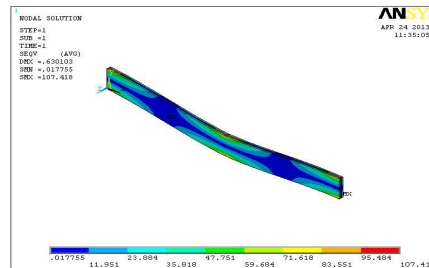


Von mises stress

BENDING RESULTS OF JUTE GLASS JUTE GLASS SPECIMEN (4-LAYER)

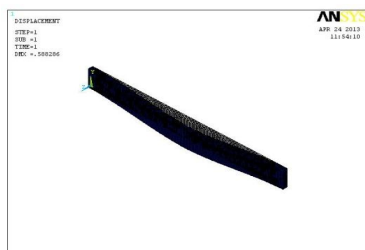


Deformed shape

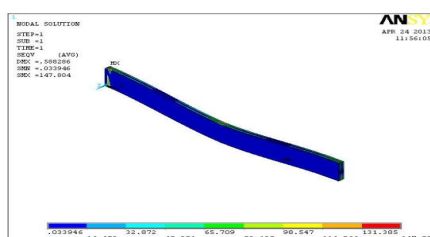


Von mises stress

COMPRESSION RESULTS OF JUTE GLASS JUTE SPECIMEN (3-LAYER)

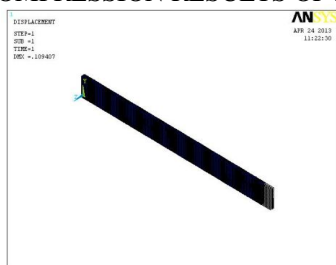


Deformed shape

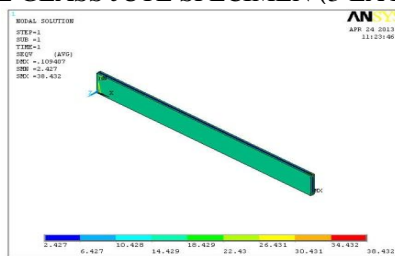


Von mises stress

COMPRESSION RESULTS OF JUTE GLASS JUTE GLASS SPECIMEN (4-LAYER)

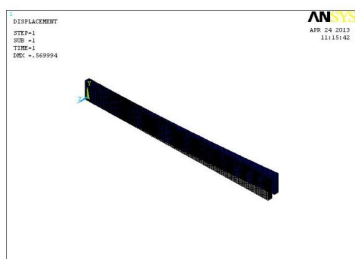

Deformed shape

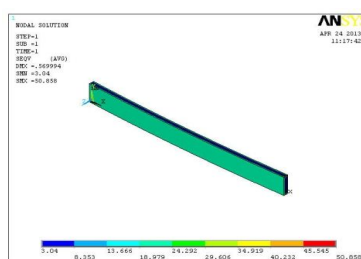

Von mises stress

V.CONCLUSION

The following conclusions are drawn from the present work. The 4 layered jute glass jute glass specimen is more stiffer than 3 layered jute glass jute specimen because the percentage reduction in deflection is 37.5%, and also it is 3.2 % more hard enough than 3 layered one. The inter laminar shear stresses are 81.23% more in 3 layered one than the 4 layered one. The bending strength of 3 layered specimens is 16.6% more than the 4 layered one. The tensile and the compressive strength of 4 layered jute glass jute glass specimen is 18.75% and 30.76% more than the 3 layered jute glass jute specimen.

REFERENCES

1. Li XH, Meng YZ, Wang SJ, Rajulu AV, Tjong SC. "Completely biodegradable composites of poly (propylene carbonate) and short, lignocellulose fabric hildegardiapopulifolia." J PolymSci: Part B; Volume 42, (2004): p. 666–675.
2. Shibata M, Takachiyo K, Ozawa K, Yosomiya R, Takeishi H. "Biodegradable polyester composites reinforced with short abaca fiber." J ApplPolymSci; Volume 85, (2002): p. 129–138.
3. Iannace S, Nocilla G, Nicolais L. "Biocomposites based on sea algae fibers and biodegradable thermoplastic matrices." J ApplPolymSci; Volume 73, (1999): p. 583–92.
4. Shibata M, Ozawa K, Teramoto N, Yosomiya R, Takeishi H. "Biocomposites made from short abaca fiber and biodegradable polyester." Macromol Mater Eng; Volume 288, (2003): p. 35–43.
5. Luo S, Netravali A.N., "Interfacial and mechanical properties of environment-friendly 'green' composites made from pineapple fibers and poly (hydroxybutyrate-co-valerate) resin." J Mater Sci; Volume 34, (1999): p. 3709–3719.
6. Rout J, Misra M, Tripathy SS, Nayak SK, Mohanty AK. "The influence of fiber treatment on the performance of coir-polyester composites." Compos SciTechnol; Volume 61, (2001): p. 1303–1310.
7. Bisanda ETN. "The effect of alkali treatment on the adhesion characteristics of sisal fibres." Appl Comp Mater; Volume 7, (2000): p. 331–339.
8. Gassan J, Bledzki A.K. "Possibilities for improving the mechanical properties of jute/epoxy composites by alkali treatment of fibres." Compos Sci Technol.; Volume 59, (1999): p. 1303–1309.
9. Usmani M.Arthur, Salyer O. Ival, Ball L. George, Schwendeman L. James, "Bagasse-Fiber-Reinforced Composites." Journal of Elastomers and Plastics, Volume 13, No. 1, (1981): p. 46-73.
10. Monteiro S.N.; Rodriguez R.J.S.; De Souza M.V., D'Almeida J.R.M., "Sugar Cane Bagasse Waste as Reinforcement in Low Cost Composites", Advanced performance Material, Volume 5, No.3, (December 1998): p. 183-191.
11. Vazquez A., Dominguez V. A., Kenny J. M., "Bagasse Fiber-Polypropylene Based Composites." Journal of Thermoplastic Composite Materials." Volume 12, No. 6, (1999): p. 477-497.
12. Hassan M.L., Rowell R.M., Fadi N.A., Yacoub S.F. and Chrisainsen A.W. "Thermo plasticization of Bagasse. I. Preparation and Characterization of Esterified Bagasse Fibers." Journal of applied polymer science, Volume 76, (2000): p. 561-574.
13. Hassan M.L., Rowell R.M., Fadi N.A., Yacoub S.F. and Chrisainsen A.W. "Thermo plasticization of Bagasse. II. Dimensional Stability and Mechanical Properties of Esterified Bagasse Composite." Journal of applied polymer science, Volume 76, (2000): p. 575-586.